


# Touch Pos JZ-TI310



## Supported by



Authorized Reseller



Janz Service Center : 0804 1401 061



Machtvoll Pos



Touch Pos JZ - TI310

# Touch Pos JZ-TI310


## High Performance 15" JZ Terminal

### Features

- Support Ivy Bridge Intel®Core™ i3-3220 3.3 GHz
- 15" True Flat Touch Screen with PCap Technology
- Bezel Free Front Panel
- HDD Easy maintenance design
- Optional Side Mount MSR / i-Button / Fingerprint
- Optional Black Mount VFD / 2nd Display
- Optional Integrated wireless LAN / RFID
- Small Footprint with Integrated 120W AC adapter holder kit
- Waterproof Front Panel



### Dimension Drawing

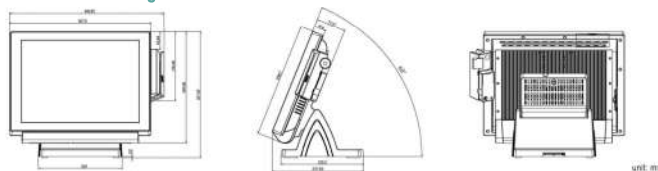

<b>System</b>	Intel® CPU series
<b>CPU Support</b>	Core™ i5-3550S 3.7GHz, L2 Cache-6MB Core™ i3-3220 3.3GHz, L2 Cache-3MB Celeron® G530 2.4GHz, L2 Cache-2MB
<b>Memory</b>	DDR3 SO-DIMM (1Slot, up to 8GB)
<b>Core Logic</b>	intel® H61
<b>Network</b>	10/100/1000 Base-T Fast Ethernet
<b>power Supply</b>	120~150 Watt Power Adapter
<b>system Weight</b>	With power adapter approx 7kg
<b>Dimension</b>	367 x 318 x 78 mm
<b>OS Support</b>	POSReady2009 / POS Ready7
<b>Audio</b>	2W Speaker
<b>Storage</b>	
<b>SATA</b>	1 x 2.5" HDD or SSD

<b>I/O ports</b>	
USB	4 x USB on rear 1x USB on side bezel
Serial Ports	3 x DB9, 1 x RJ45, + 5 V/12V selectable
PS/2	1 x PS/2 ports (default at keyboard)
LAN	1 x RJ45
VGA	1 x DB15
Cash Drawer	1 x RJ11 (+12V or +24V selectable)
Line out	1 x Phone Jack
DC-in	1 x 4pin DC Power Jack
<b>Peripheral</b>	
Customer Display	VFD, 20 columns & 2 lines, each column 5 x 7 dots
MSR & i-Button	ISO I,II,III; JIS I,II support information key
RFID	ISO 14443A, Mifare, Felica-lite
2nd Display	8" or 10.4" LCD
Fingerprint	8-bit grayscale, reader
<b>Display</b>	
LCD	15" TFT LCD
Max. Resolution	1024 x 768
Brightness	250 cd/m²
Touch Screen	Bezel-Free Projected Capacitive or 5-wire Analog resistive
Tilt Angle	0~68°
<b>Environment</b>	
EMC & Safety	CE / FCC
Operating Temp.	0 ~ 35° C
Storage Temp.	-20 ~ 60° C
Humidity	20 ~ 90%

